

CX-22

Architecturally Discreet Ceiling Antenna

The CX-22 provides remote antenna coverage for wireless microphones in diverse architectural environments. Designed for wideband UHF, it also features strong sensitivity in the 216 MHz range to accommodate assistive listening systems. The CX-22 is mounted in a low-profile, 14" X 14" form factor designed for ceiling installation. Popular in training facilities, classrooms, lecture-halls, houses of worship, and boardrooms, the CX-22 is an ideal tool for maximizing signal where aesthetic considerations make placement of traditional directional antennas impossible, as well as for distributed antenna systems (DAS) in large facilities with drop-ceiling environments. The CX-22 ships in matte white and can be painted to match any interior.


Hardware mounting kit included.



Front view

Rear view

Elevation

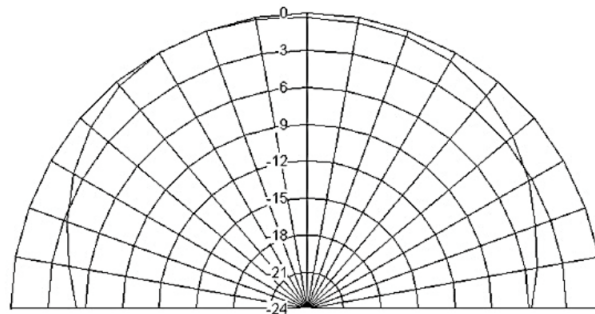

Electrical

Operating frequency	216 + 470-698 MHz
Bandwidth	228 MHz
Impedance	50Ω
Average return loss	-6.07 dBm
Pattern type	Flood
Gain	6 dBd
F/B ratio	N/A
F/S ratio	N/A
Polarization	Linear

Physical

Dimensions	355mmX355mm / 14" X 14"
Weight	0.9 kg / 2 lbs
Mount location	Ceiling tile
Operating temperature	-10°C-40°C
Color	White
Connector(s)	BNC female